

Customer**Supplier**

Company name
Editor
Phone number
E-mail

Fields of Application

Water supply and booster stations
Irrigation, overhead irrigation and draining
Filling and emptying of tanks and containers
Circulating of hot and cold water in HVAC systems
Pumping of condensate
Water circulating for swimming pools
Sanitary and cleaning installations
For industrial applications and public services
Fresh water supply on ships

**Design Specification**

Single-stage, end suction, centrifugal volute pump.

Main dimensions according to EN 733.

Single entry, closed impeller is hydraulically thrust compensated and dynamically balanced.

Pump and motor are separate components, connected to each other via a flexible coupling and mounted on a common base plate.

Maintenance is very much easier, the impeller shaft and other rotating parts being removable with no need to disconnect the suction and delivery pipes.

In fact the use of one extension coupling enables a pump to be dismantled without moving either the driver or the pump casing.

Maximum interchangeability of components, identical parts can be used with various sizes of a pump, which greatly simplifies and reduces stock of spare parts.

Technical Data

Suction Flange	: DN50 - DN400
Discharge Flange	: DN32 - DN350
Operating Pressure	: 10 bar
Temperature Range	: Up to 140 °C
Speed Range	: 1000 - 3500 rpm
Flow Range	: 5 - 3500 m ³ /h
Head Range	: 4 - 105 m

Bearings

The pump has sturdy maintenance-free antifriction bearings, which are greased for life with high-temperature grease. A deflector on the shaft prevents leakage fluid from getting into bracket.

Customer
Supplier

Company name
Editor
Phone number
E-mail

Operating data specification

Pumped fluid	Water	Rated flow	138	m ³ /h
Solids		Rated head	25	m
Kind		Geodetic head	0	m
Percentage of solid content	0	Available system NPSH		m
pH value		Inlet pressure (pin)	0	kPa
Temperature	20	Altitude above sea level	100	m
Density	998.3	Max. operating pressure	269	kPa
Kin. viscosity	1.005	Max. diff. pressure	269	kPa
Vapour pressure	2.34			

Pump

Make	MAS DAF	Impeller type		
Pump type	NM 100-315	Impeller construction		
Frame size	100-315	Impeller Ø		
Design	End Suction	Max.	328	mm
Self priming	<input checked="" type="checkbox"/> No	designed	274	mm
Speed	1450	rpm	263	mm
Stages	1	Flow		
Suction port		Nominal	185	m ³ /h
Pressure rating	PN16	Max.	257	m ³ /h
Nominal pipe size	DN125	Min.	0	m ³ /h
Standard	DIN	Head		
Discharge port		Nominal	21.8	m
Pressure rating	PN16	Min.	14.1	m
Nominal pipe size	DN100	Max.	27.5	m
Standard	DIN	Shut off head	27.5	m
Shaft power	13.3	kW	NPSH3	3.04
Shaft power P2(Q=max.)	16.4	kW	Efficiency	70.5

Motor

Make/Type	15 KW-1500 RPM / 160L
Specific design	IE2 / 50 Hz / Pole pairs 2
Rated power	15 kW
Electric voltage	3~ 400 V
Speed	1465 rpm
Electric current	29 A
Frame size	160L
Degree of protection	IP 55
Type of protection	
Explosion protection	

Coupling

Make/Type	
Series	
Spacer length	mm
Frame size	

Materials


Pump		Shaft seal	Soft Packing
Pump Casing	GJL-250 (GG25)	Material code	
Impeller	GJL-250 (GG25)		
Shaft	A 276 Type 420 (X20Cr13)		
Bearing Housing	GJL-250 (GG25)		

Customer

Supplier

Company name
Editor
Phone number
E-mail

Power data referred to: Water; 20°C; 998.3kg/m³; 1.005mm²/s Sense of rotation Clockwise from the drive end

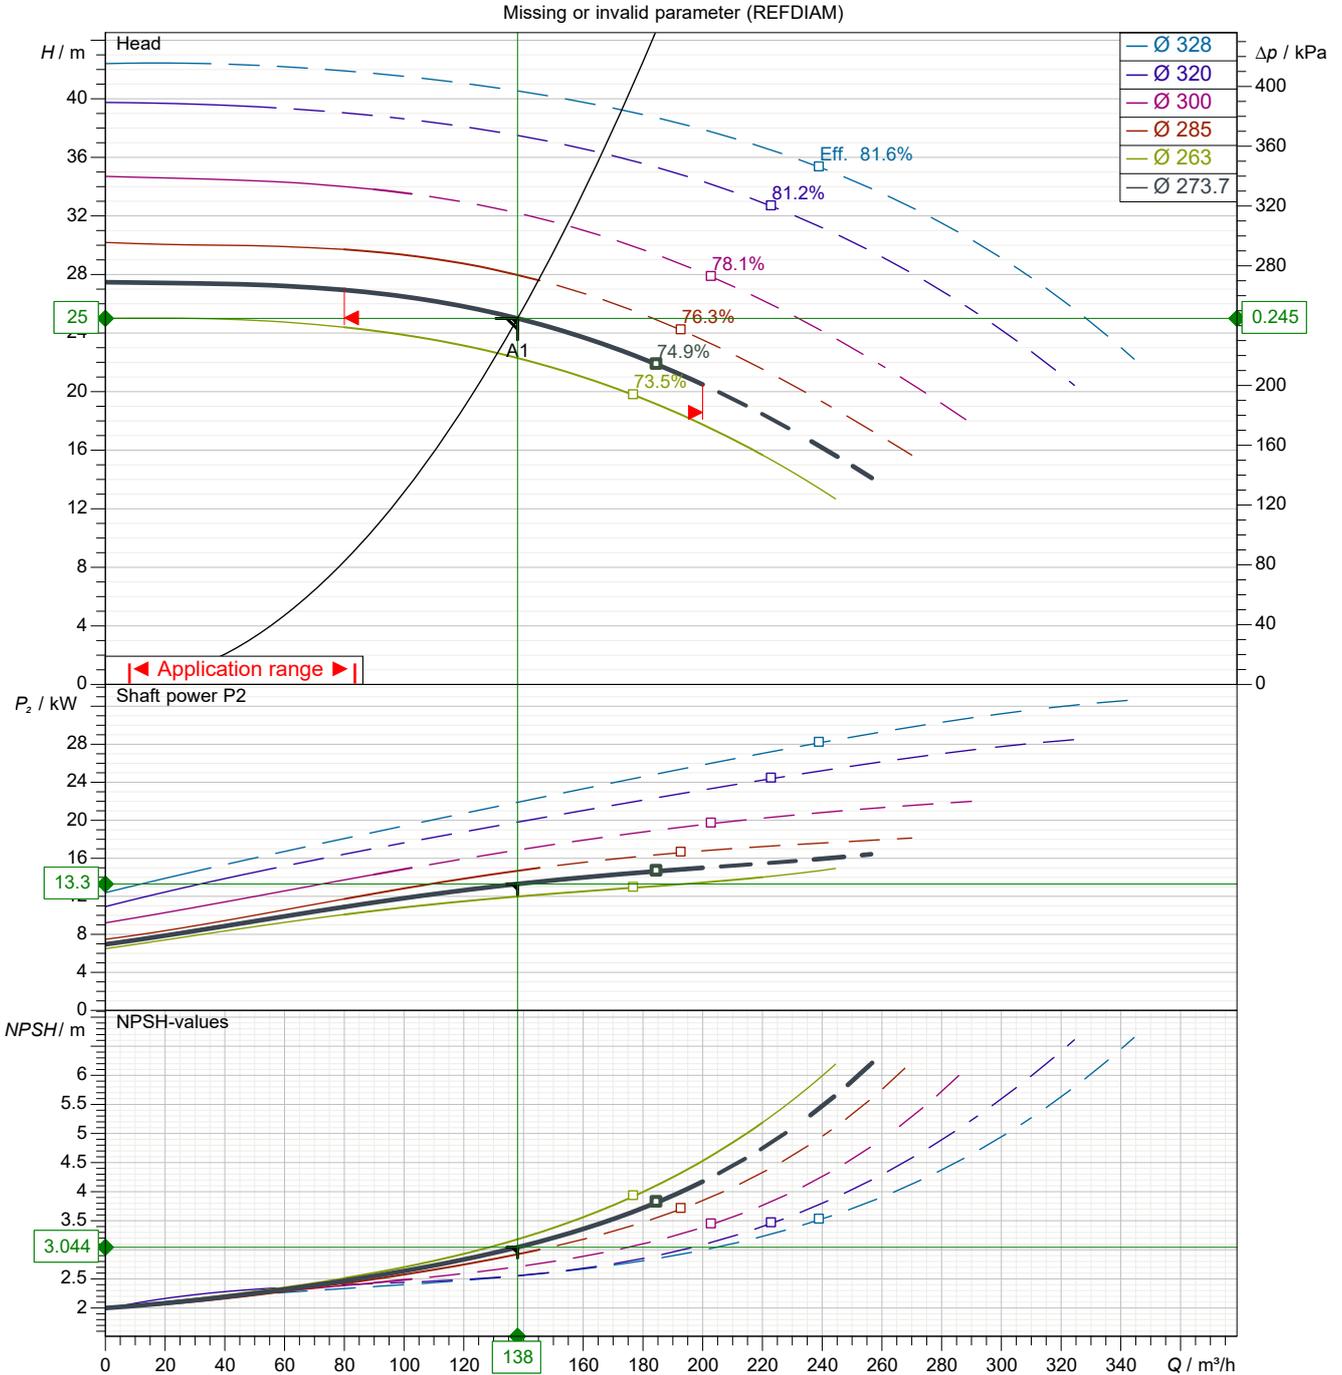

Pump curves in accordance with ISO 9906 2B

Pumped fluid	Water	Rated flow	138	m ³ /h
Temperature	20 °C	Rated head	25	m
Density	998.3 kg/m ³	Shaft power	13.3	kW
Kin. viscosity	1.005 mm ² /s	Speed	1450	rpm
Vapour pressure	2.34 kPa	NPSH3	3.04	m
Impeller Ø	274 mm	Efficiency	70.5	%

Subject to change

Projec

Issue date
2022-07-28



Last update
2022-07-28

Customer

Supplier

Company name
Editor
Phone number
E-mail

Performance curves

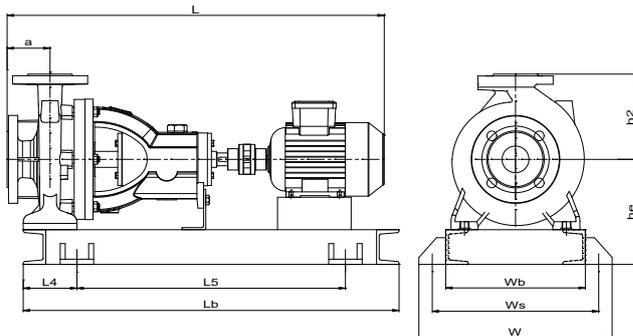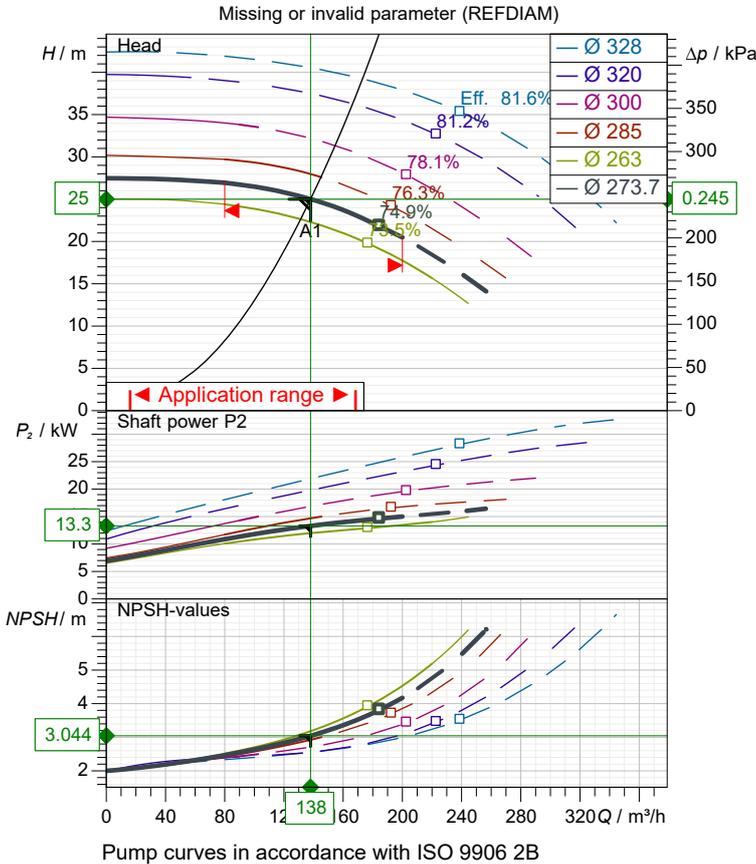

Dimensions	mm
a	140
h2	315
he	350
L	1286
L4	150
L5	850
Lb	1150
w	520
wb	420
ws	470

Pump

Make	MAS DAF
Pump type	NM 100-315
Design	End Suction
Suction port	
Pressure rating	PN16
Nominal pipe size	DN125
Standard	DIN
Discharge port	
Pressure rating	PN16
Nominal pipe size	DN100
Standard	DIN

Operating data specification

Pumped fluid	Water	
Temperature	20	°C
Density	998.3	kg/m ³
Kin. viscosity	1.005	mm ² /s
Vapour pressure	2.34	kPa
Rated flow	138	m ³ /h
Rated head	25	m
Shaft power	13.3	kW
Speed	1450	rpm
NPSH3	3.04	m
Efficiency	70.5	%
Impeller Ø	274	mm

Motor

Make/Type	15 KW-1500 RPM / 160L	
Specific design	IE2 / 50 Hz / Pole pairs 2	
Rated power	15	kW
Speed	1465	rpm
Electric voltage	3~ 400	V
Electric current	29	A
Degree of protection	IP 55	

Materials


Shaft seal	Soft Packing
Material code	

Pump Casing	GJL-250 (GG25)
Impeller	GJL-250 (GG25)
Shaft	A 276 Type 420 (X20Cr13)
Bearing Housing	GJL-250 (GG25)

Customer

Supplier

Company name
Editor
Phone number
E-mail

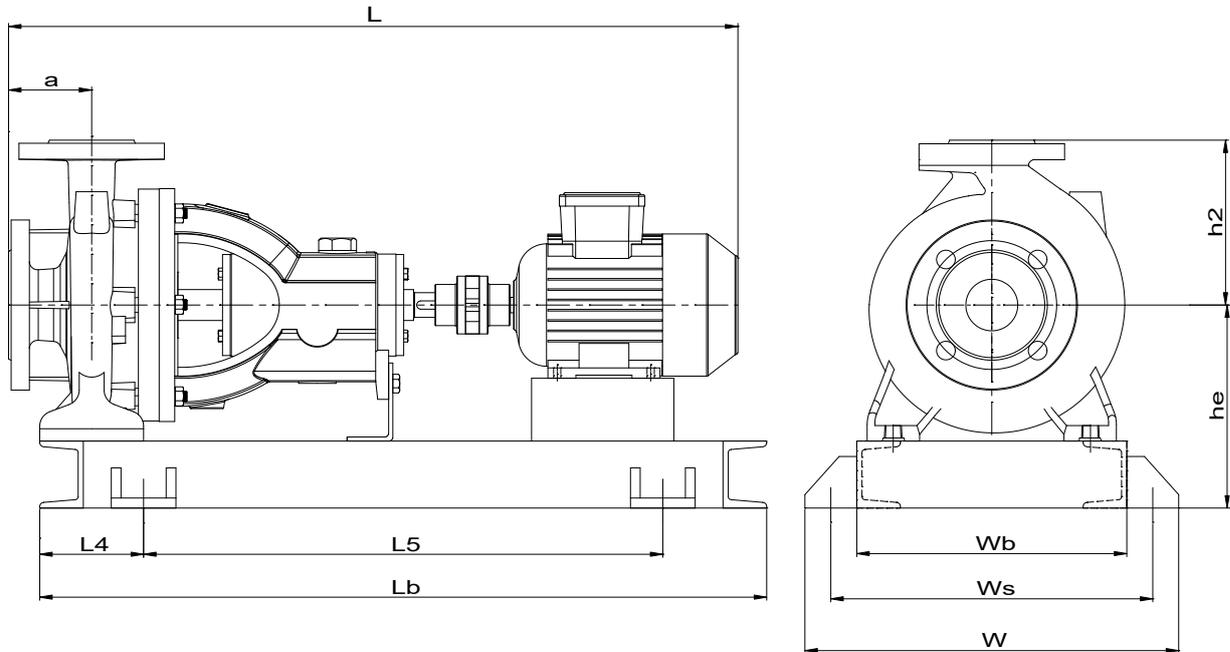


Dimensions	mm	Inlet / outlet	
a	140	Suction port	Discharge port
h2	315	DN125	DN100
he	350	PN16	PN16
L	1286		
L4	150		
L5	850		
Lb	1150		
w	520		
wb	420		
ws	470		

Customer

Supplier

Company name
Editor
Phone number
E-mail

motor data

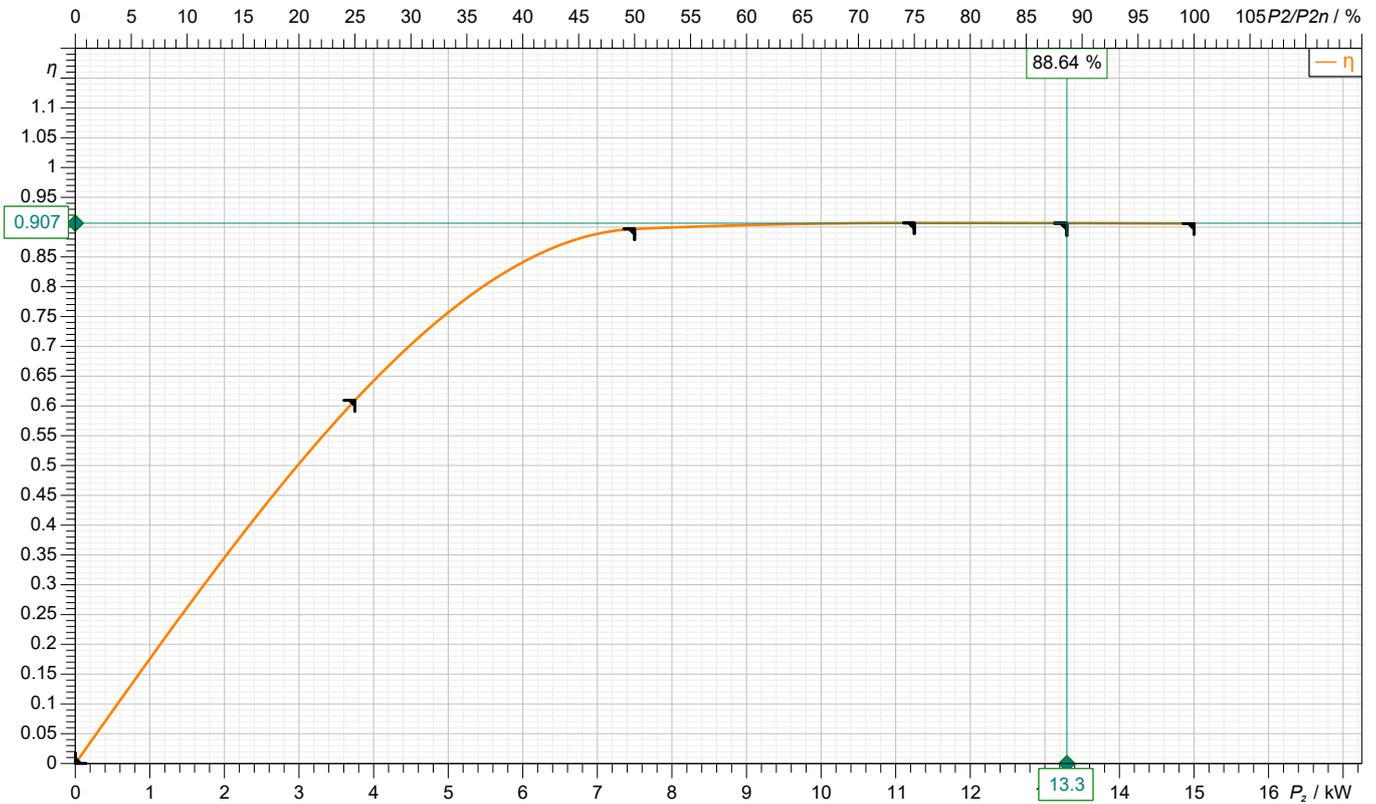

Symbol	No load	25 %	50 %	75 %	100 %	125 %
P ₂ / kW	0	3.75	7.5	11.25	15	
P ₁ / kW		6.153	8.361	12.4	16.56	
η / %	0	60.94	89.7	90.7	90.6	


Motor

Make/Type	15 KW-1500 RPM / 160L	Degree of protection	IP 55
Specific design	IE2 / 50 Hz / Pole pairs 2	Type of protection	
Rated power	15 kW	Explosion protection	
Electric voltage	3~ 400 V	Service factor	1.15
Number of poles	4	Starting current	
Speed	1465 rpm	Starting torque	
Electric current	29 A	Moment of inertia	
Power factor	0.81	No. starts per hour	
Frame size	160L	Rated torque	97.8 Nm
Efficiency class	IE2	Insulation class	F (155C°)

Customer

Supplier

Company name
Editor
Phone number
E-mail

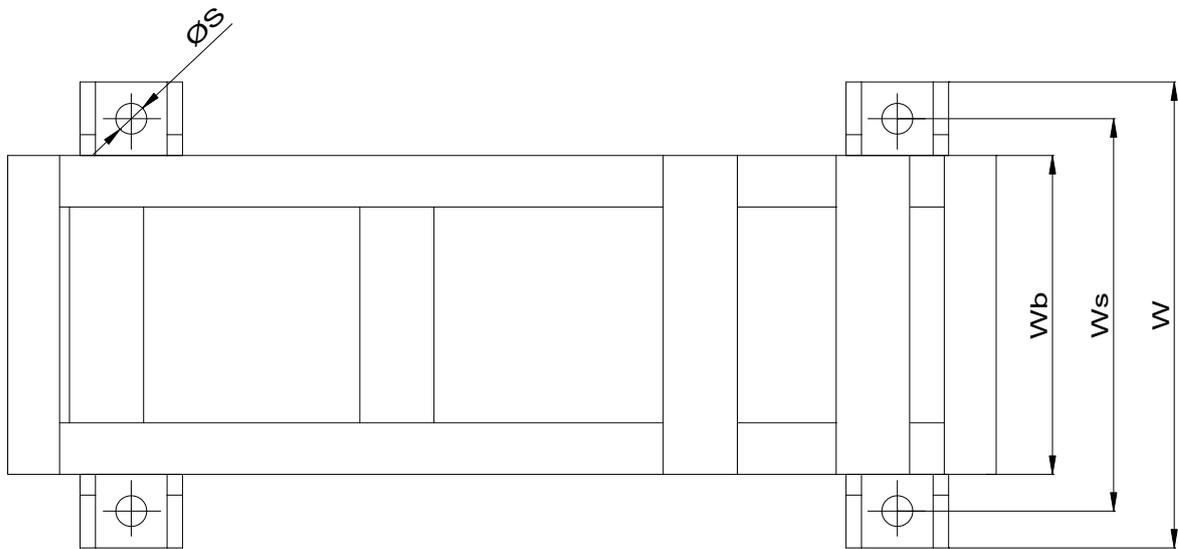

Dimensions	mm
hb	100
L4	150
L5	850
Lb	1150
S	24
w	520
wb	420
ws	470



Spare part list
NM 100-315

Revision number

Page
9

Company name
Editor
Phone number
E-mail

Customer

Supplier

Subject to change

Projec

Issue date
2022-07-28

Last update
2022-07-28



Spare part list
NM 100-315

Revision number

Page
10

Company name
Editor
Phone number
E-mail

Customer

Supplier

Subject to change

Projec

Issue date
2022-07-28

Last update
2022-07-28