

Application

- To transfer clean water with liquid temperature between 0°C and 40°C
- Application in water supply and drainage for factories, mines, municipal facilities as well as field irrigation, etc.

Features

- All new design with ergonomic feature
- High lift series with LEO high efficient hydraulic system
- Reliable 4-stroke engine with low fuel consumption and high quality crankshaft
- Portable, durable and compact pump frame
- Durable sealing system with special mechanical seal
- Optional outlet selection


Pump

- Anti-rust cast iron impeller and diffuser
- Max.Suction: 8 m , Suck 5 m needs 120 s
- Inlet/outlet: 2"/3"

Engine

- Single cylinder,4-stroke,Air-cooled
- Max.power: 3.8 HP
- Rated speed: 3600 rpm
- Reliable engine equipped with low engine oil shut off system


Identification Codes

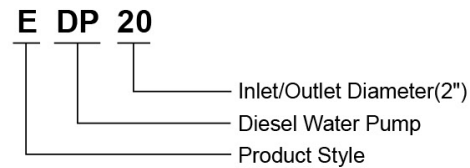

EDP

Technical Data


Model	Power	Fuel Tank	Engine Oil	Displacement	Engine	Q(m ³ /h)									
	HP	L	L	cc		0	5	10	15	20	25	30	40	55	
EDP20	3.8	2.5	0.8	219	D170	H	25	23	21	18.5	15	10	-	-	-
EDP30	3.8	2.5	0.8	219	D170	(m)	25	23.5	22	20.3	18.5	16.5	14.5	10.2	3.5

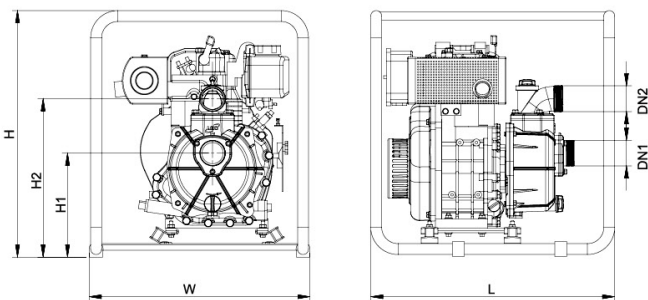

Dimension


Model	DN1	DN2	L (mm)	W (mm)	H (mm)	H1 (mm)	H2 (mm)
EDP20	2"	2"	470	427	536	225	335
EDP30	3"	3"	470	427	536	240	390

Hydraulic Performance Curves

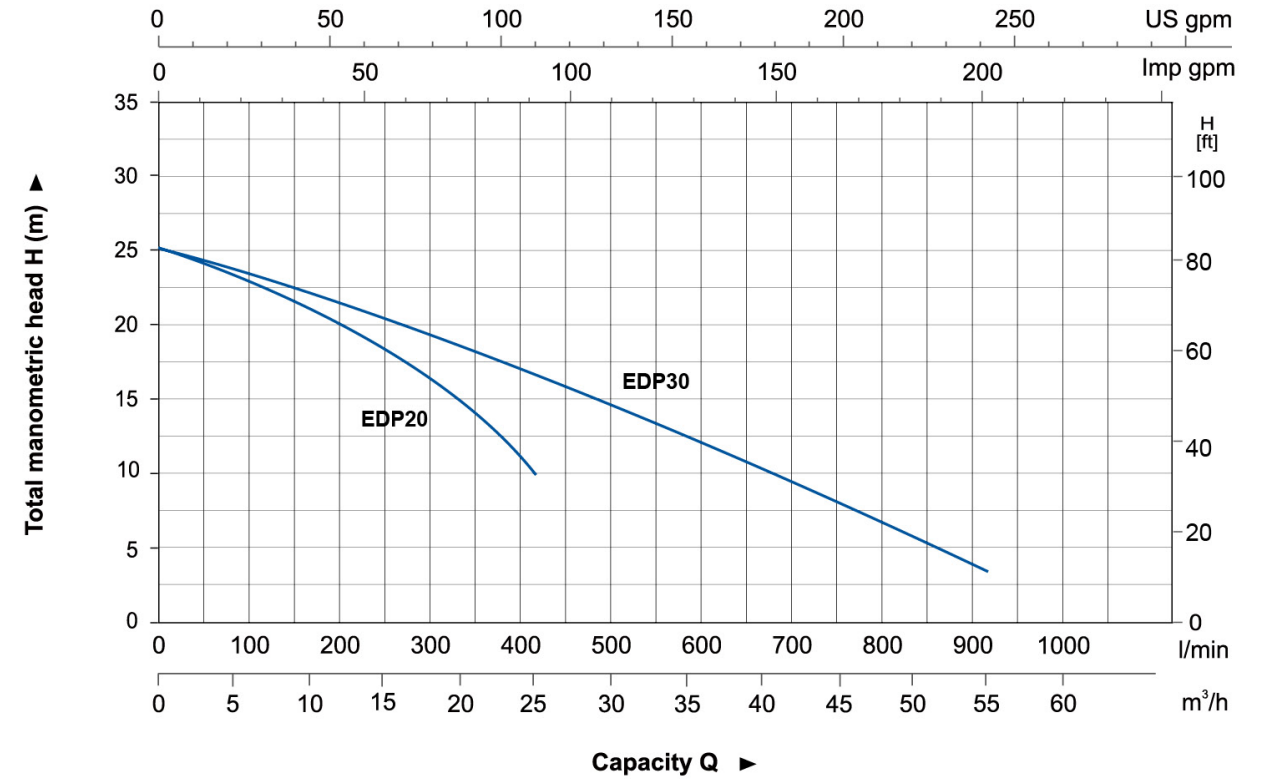

Materials Table

No.	Part	Material
1	Frame	Steel
2	Engine	
3	Pump cover	Aluminum
4	O-ring	NBR
5	Mechanical seal	Carbon/Ceramic
6	Impeller	HT200
7	Diffuser	HT200
8	O-ring	NBR
9	Pump body	Aluminum
10	Seal	NBR
11	Outlet	Aluminum
12	Plug	ABS
13	Non-return valve	NBR
14	Inlet	Aluminum

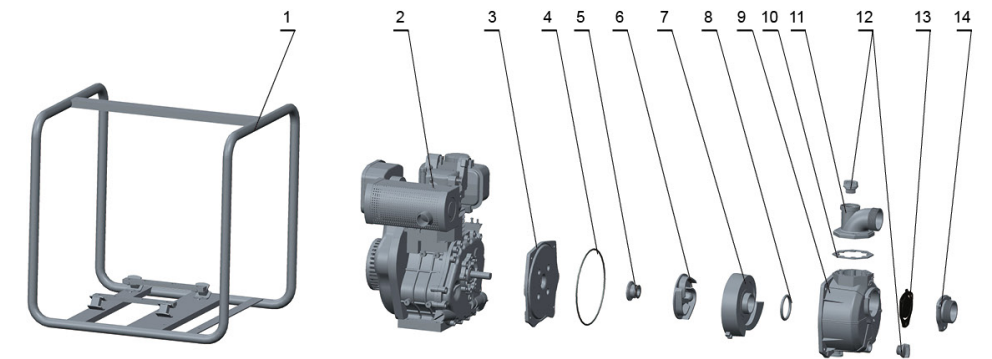

Package Information

Model	GW (Kgs)	L (mm)	W (mm)	H (mm)	Quantity (PCS/20'TEU)
EDP20	35.1	485	435	550	244
EDP30	36.2	485	435	550	244